

Mobile Antenna

9350

The **9350 Automatic Tuning Whip Antenna** is designed for mobile operation with transceivers that have a large channel capacity.

KEY FEATURES

Rugged design

The 9350 antenna is constructed to withstand the severe environmental conditions usually experienced in some of the more remote areas of the world. It meets or exceeds the shock and vibrations requirements for MIL-STD-810.

The main antenna section is constructed of fibreglass reinforced nylon. This provides a weatherproof housing for the control and tuning devices, which are fitted inside. It is mounted on an anti-vibration base that incorporates rubber mounts.

The 9350 antenna will operate in a broad range of temperatures.

Fast, optimum tuning

Typically, the 9350 takes only a few seconds to tune to any frequency. It will seek the optimum tuning point for all operating conditions—this ensures the best communications possible.

High radiation efficiency

The 9350 antenna has a comparably high rate of radiation efficiency. It is rated for maximum voice power of 125 watts PEP.

ADDITIONAL FEATURES

Continuous tuning

The whip antenna uses a microprocessor controlled stepper motor to provide continuous tuning to any required frequency over the transmit/receive operating range of 2–30 MHz.

Sensitive to weak signals

When in Scan or Free Tune Receiver mode, a broadband amplifier is activated. This makes the antenna sensitive to even the weakest signals over the entire frequency range.

Two whips supplied

Two whip top sections are provided with the 9350 antenna. The standard or primary whip is a wire that is encased in a polyurethane covered fibreglass rod. It is designed to withstand substantial flexing and hard knocks and operates over the full frequency range of this antenna.

The shorter, secondary whip is manufactured from stainless steel. It is designed for use as a backup in emergency situations when the standard whip has been damaged. This whip is only suitable for operation over a transmit frequency range of 2.5–30 MHz and is less efficient than the primary whip.

Antenna mounted at bumper height



Antenna mounted on bull bar




Antenna mounted at rear bumper height



SPECIFICATIONS

Frequency range	Primary whip top Transmit operation: 2–30 MHz
	Secondary whip top Transmit operation: 2.5–30 MHz
	Receive-only (Scan mode/Free Tune Receiver mode): 250 kHz – 30 MHz
Power rating	125 watts PEP (voice)
Power consumption	Static: 150 mA Tuning: 1 A (12 V DC nominal—supplied from the transceiver)
Input impedance	50 ohms: VSWR typically 1.5:1
Temperature	–40 to +60°C
Tuning speed	Typically 2 seconds
Size and weight	Primary whip: 2.47 m; 5.8 kg

9350 Automatic tuning whip antenna

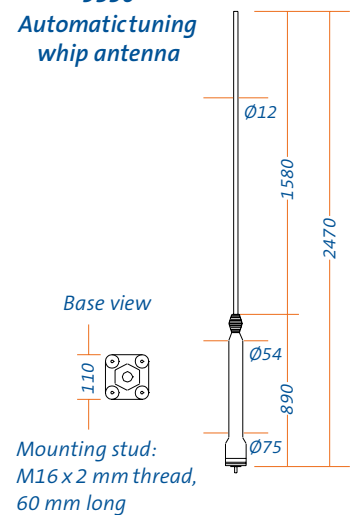

The **Near Vertical Incidence Skywave (NVIS) kit** is an add-on accessory for the Codan 9350 antenna.

Short vertical whip antennas are poor radiators at high take-off angles. This makes short distance communications difficult, especially so in hilly terrain. Making the whip longer and more horizontal improves the high take-off angle radiation efficiency.

KEY FEATURES

Improves short-range communications

Transmit and receive paths over the range of 0–500 kms will be greatly improved with the addition of the NVIS kit.

Easily attached to a variety of vehicles

The NVIS kit can be quickly and easily attached to a wide variety of vehicles. All fitting instructions are provided—no special tools are required.

ADDITIONAL FEATURES


Rugged design

The tough design of the NVIS has been proven through extensive field testing.


Easy to transport

The NVIS kit is supplied in a canvas bag for ease of transportation.

Note: the frequency range of the NVIS kit is 1.6–12 MHz

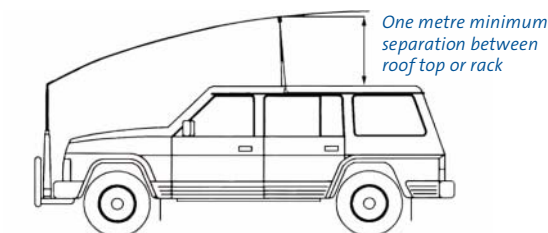

Antenna mounted at bumper bar height

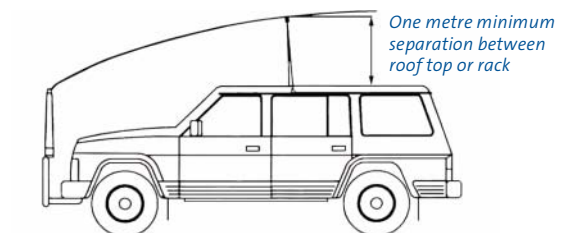

Antenna mounted on bull bar

Equipment descriptions and specifications are subject to change without notice or obligation

Head Office

Codan Limited
ABN 77 007 590 605
81 Graves Street
Newton SA 5074
AUSTRALIA
Telephone +61 8 8305 0311
Facsimile +61 8 8305 0411
www.codan.com.au

Asia Pacific

Codan Limited
81 Graves Street
Newton SA 5074
AUSTRALIA
Telephone +61 8 8305 0311
Facsimile +61 8 8305 0411
asiasales@codan.com.au

EMEA

Codan (UK) Ltd
Unit C4 Endeavour Place
Coxbridge Business Park
Farnham Surrey GU10 5EH
UNITED KINGDOM
Telephone +44 1252 717 272
Facsimile +44 1252 717 337
uksales@codan.com.au

Americas 12-20051 Issue 14: 9/08

Codan US, Inc.
8430 Kao Circle
Manassas VA 20110
USA
Telephone +1 703 361 2721
Facsimile +1 703 361 3812
ussales@codan.com.au